


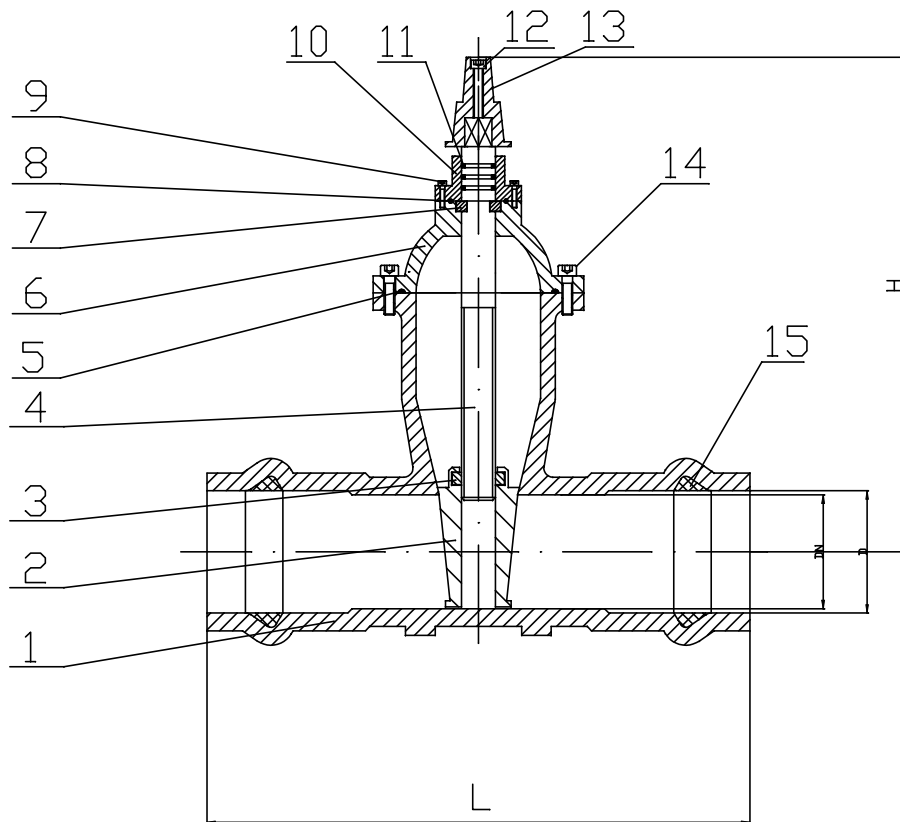

D I M E N S I O N S										Unit : mm	
SIZE	PVC Tube	F L A N G E					L	R E F E R E N C E			
		øPCD	R	n-øh Dr.	T	t1		H	—	—	
DN50(2")	63	—	—	—	—	—	250	200	—	—	
DN65(2½")	75	—	—	—	—	—	270	210	—	—	
DN80(3")	90	—	—	—	—	—	280	250	—	—	
DN100(4")	110	—	—	—	—	—	300	280	—	—	
DN125(5")	—	—	—	—	—	—	—	—	—	—	
DN150(6")	160	—	—	—	—	—	350	385	—	—	
DN200(8")	200	—	—	—	—	—	400	460	—	—	
DN250(10")	250	—	—	—	—	—	450	580	—	—	
DN300(12")	315	—	—	—	—	—	500	640	—	—	

P.NO.	DESCRIPTIONS	MATERIAL	Q'TY	REMARK
1	BODY	GGG50	1	
2	DISC/WEDGE	GGG50+EPDM	1	
3	STEM NUT	BRASS	1	
4	STEM	SS420	1	
5	GASKET	EPDM	1	
6	BONNET	GGG50	1	
7	LOCATING RING	BRASS	1	
8	O-RING	EPDM	1SET	
9	BOLTS	C.S.	1SET	
10	GLAND	GGG50	-	
11	O-RING	EPDM	1SET	
12	BOLTS	C.S.	1SET	
13	CAP	GGG50	1	
14	BOLTS	C.S.	1SET	
15	SEALING RING	NBR	1	

NOTE

1.BASIC DESIGN ; DIN3352 F5

2.FACE TO FACE ; ISO5752 SERIES.15 , EN558 SERIES.15

3.PRESSURE RATING : UPTO 16 BAR

4.	HYDRO TEST	
	BODY	24 bar
	SEAT	18 bar

5.PAINT ; FBE (RAL 5005, 200 microns)

△						
△						
△						
NO.	DATE	DESCRIPTION	DRA.	DES.	CHK.	APR.
ANC CORPORATION						
TITLE	RESILIENT SEATED GATE VALVE SRS940S, DN50 - DN300					
APR.	S.K.K	SCALE	N / S	REV. NO.		
CHK.	M.B.C	DATE	2022.02.21			
DES.	J.G.S	DWG No.	220221-07	0		